


Barco 20" CVM 3551 Capacitor replacement chart by Nichlas Eklöf

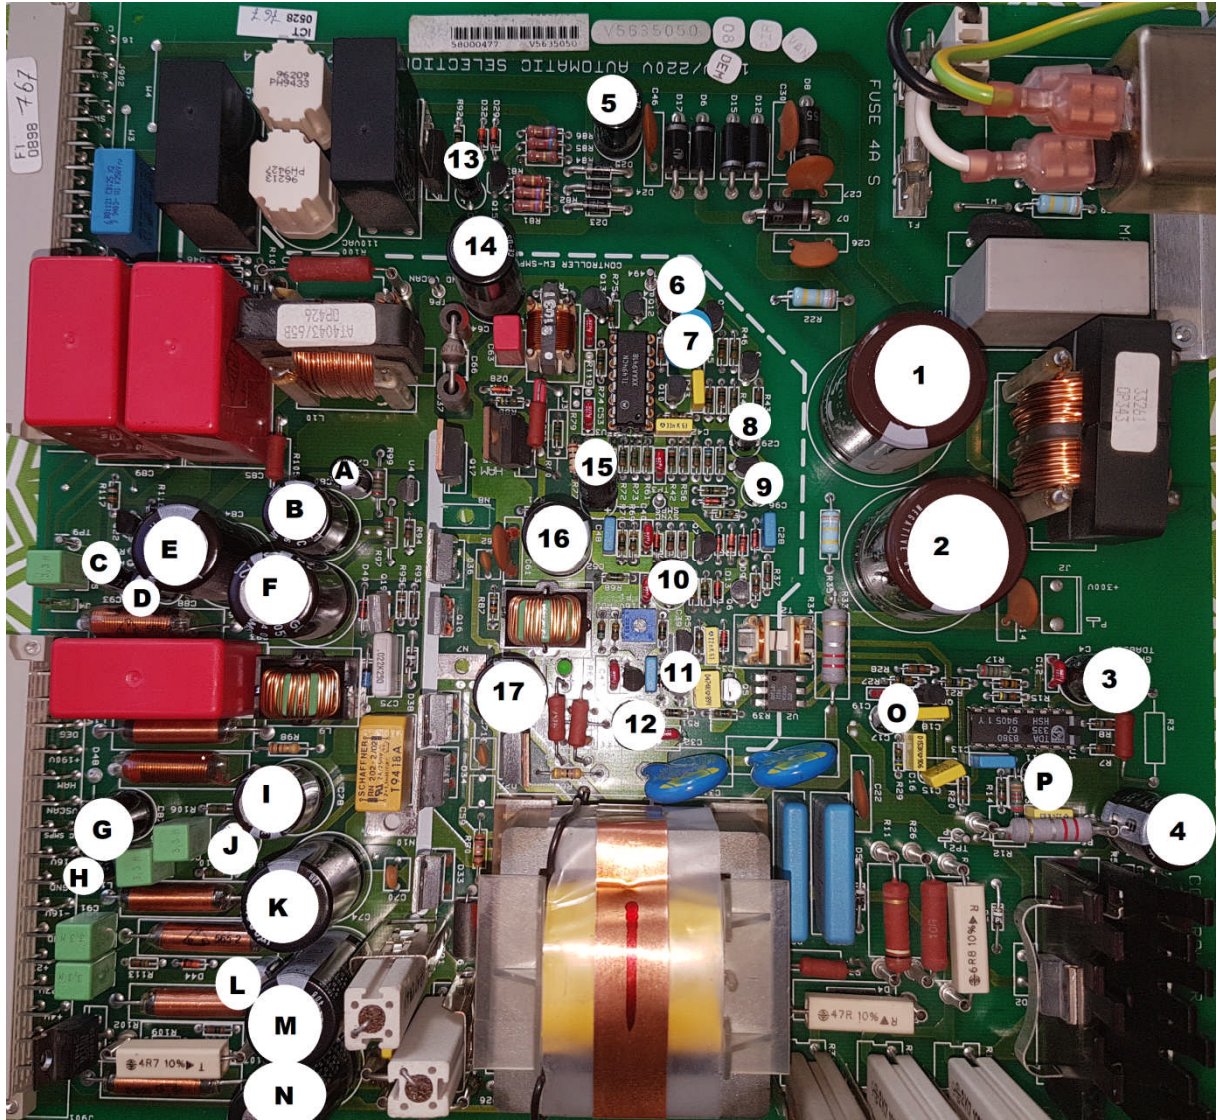

| pic nr | board Nr | capacitance | V tolerance | Hig V * |
|--------|----------|-------------|-------------|---------|
| 1      | C21      | 470         | 200         | *       |
| 2      | C20      | 470         | 200         | *       |
| 3      | C4       | 220         | 25          |         |
| 4      | C3       | 470         | 35          |         |
| 5      | C50      | 2,2         | 400         | *       |
| 6      | C45      | 100uF       | 25          |         |
| 7      | C44      | 1000pF      | 63          |         |
| 8      | C29      | 22uF        | 25          |         |
| 9      | C96      | 1uF         | 50          |         |
| 10     | C39      | 100         | 25          |         |
| 11     | C35      | 4,7uF       | 63          |         |
| 12     | C33      | 220         | 63          |         |
| 13     | C67      | 10          | 63          |         |
| 14     | C64      | 10          | 350         | *       |
| 15     | C49      | 100         | 25          |         |
| 16     | C61      | 10          | 350         | *       |
| 17     | C57      | 10          | 350         | *       |
| O      | C17      | 47uF        | 25          |         |
| P      | C11      | 2,2uF       | 63          |         |
| A      | C76      | 100         | 10          |         |
| B      | C80      | 1000        | 16          |         |
| C      | C93      | 22          | 25          |         |
| D      | C88      | 22          | 63          |         |
| E      | C84      | 2200        | 25          |         |
| F      | C79      | 2200        | 25          |         |
| G      | C87      | 220         | 25          |         |
| H      | C92      | 22          | 25          |         |
| I      | C78      | 470         | 25          |         |
| J      | C81      | 100         | 25          |         |
| K      | C74      | 1000        | 50          |         |
| L      | C77      | 100         | 10          |         |
| M      | C73      | 22          | 250         | *       |
| N      | C72      | 22          | 250         | *       |